

## 4500 Tank Sumps

**5**  
YEAR  
WARRANTY

Our 4500 Series Tank Sumps are 100% fiberglass and offer long-term reliability without deforming or cracking. 4500 Series tank sumps provide one sump that works for all single STP applications. Exposure to fuel will never void our warranty.



PC4560U



PC4540U



### Optional 4" Inspection Port

Allows quick and easy inspection without removing entire cover.



Patent No. 5,711,449

## Features and Benefits

**Universal Base** A rigid 12-sided sump base that can be used on a 42" UST collar, a manway, or a bung adapter. Smooth flat panels are easy to drill and provide leak-tight sealing surface for penetration fittings.


**Adjustable Upper Body** A large adjustable top provides 28" of height adjustability to work in both shallow burial as well as deep burial applications, with only 1 simple field determined cut.

**Twist-Lok Access Cover** The latest generation of PCI's patented "Twist-Lok" Access Covers provide a truly water-tight seal with a quick and easy 12 degree turn.

**4" Inspection Port** Optional inspection port allows quick inspection without removing the entire access cover.

**Two-Part Design with Epoxy Bonding Trough** Makes installations simpler than ever. Installers have plenty of room to install the equipment in the base before the upper body is attached. Then, one simple epoxy pour guarantees a water-tight bond.

**100% Fiberglass Materials** Provide a rigid construction that prevents deforming due to backfill. Fiberglass can be easily repaired in the field by qualified technicians if drilled incorrectly or damaged by construction equipment.

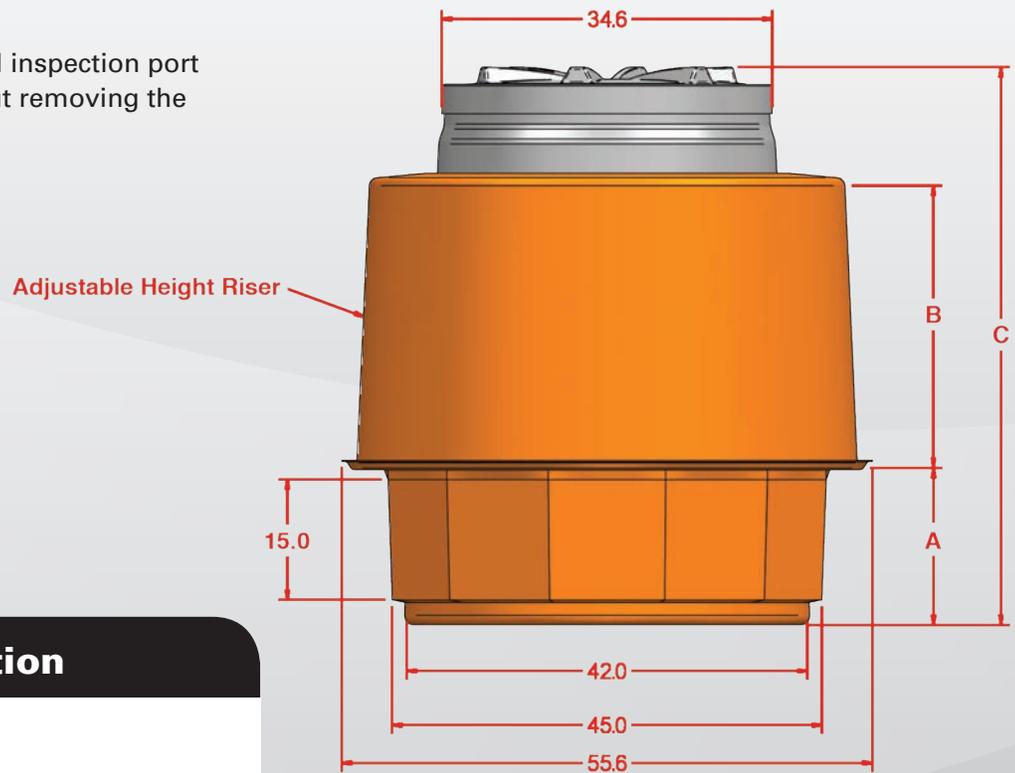

## Ordering Information

**Sump Height:**

- PC4540U: 30" – 38"
- PC4550U: 30" – 48"
- PC4560U: 30" – 58"

**Additional Options:**

- 3B0 Solid Bottom
- 3B1 Solid Bottom with E148CM epoxy kit
- 3B3 Solid Bottom with 45-GK fiberglass kit
- 3C0 No Bottom
- 3C2 No Bottom with E148CM, E142CM epoxy kits
- 3C3 No Bottom with 45-GK fiberglass kit

Example PC45XXU-XXX

Product Sizes	A	B	C
PC4540U	17.25"	0" - 8"	30.5" - 38.5"
PC4550U	17.25"	0" - 18"	30.5" - 48.5"
PC4560U	17.25"	0" - 28"	30.5" - 58.5"

A = Base Height  
 B = Adjustable Height  
 C = Overall Height

\* Dimensions are based on Solid Bottom sumps only.  
 \*\* Subtract 1" if mounting to a 42" Tank Collar  
 \*\*\* Optimum lid height is 4" below manhole cover