


DCL SERIES CONDUITLESS ENTRY DISPENSER SUMPS

DCL Conduitless Entry Dispenser Sumps eliminate unnecessary sump penetrations by allowing electrical conduits to enter the dispenser without entering the sump.

The DCL Series Sumps allow conduits to enter into both ends of the dispenser adding flexibility and making installation easier than single end conduitless entry.

Features:

- **Double Conduitless Entry** – Conduit is allowed to enter into the bottom of the dispenser on either end without penetrating the sump walls. Less entries require less penetration fittings and provide less risk for water intrusion.
- **Single Piece Construction** – Eliminates the troublesome seams that two part sumps have, resulting in less places for water to penetrate.
- **UL Listed Isophthalic Fiberglass Materials** - Provide a rigid construction that prevents deforming due to backfill. Fiberglass can be easily repaired in the field by qualified technicians if drilled incorrectly or damaged by construction equipment.
- **Smooth White Interior** – Makes the working area brighter and reduces cuts and scratches while working inside the sump.
- **Heavy Gauge Steel Frames** – Provide strength and rigidity. Designed to lock into the concrete foundation.
- **Individual Stabilizer Bars with 3-Axis Adjustment** – Accommodates multi-product dispensers without displacing the product lines. Ensures proper load transfer in the case of an impact from any direction.
- **Optional Rainlip** – Protrudes into the bottom of the dispenser to prevent surface water from rain and washdowns from entering the sump.

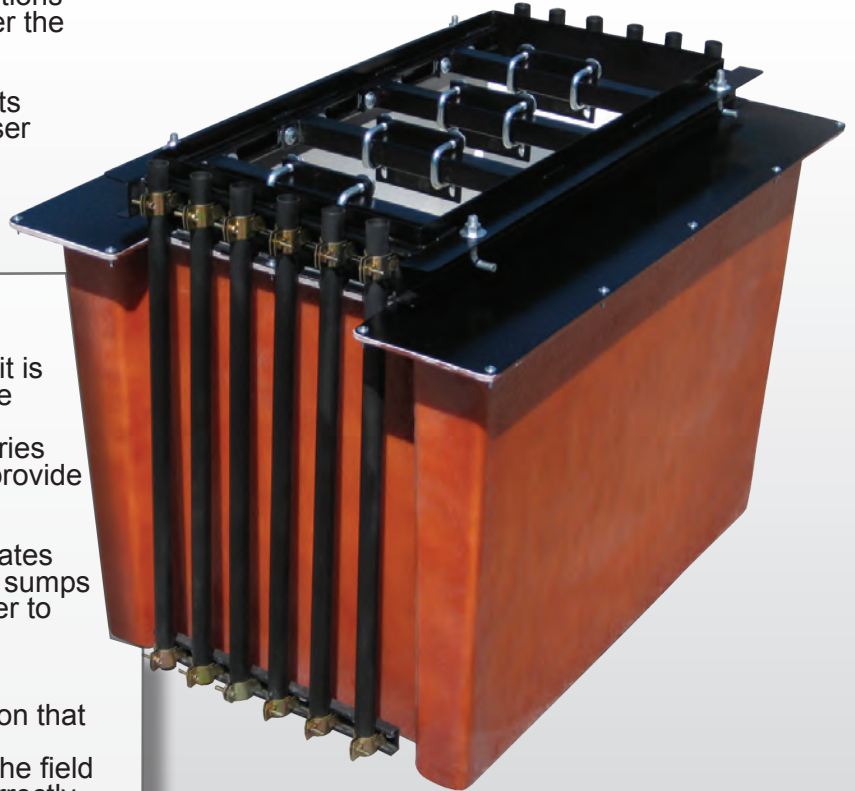

Patent No: 4,921,115