

# pci

## TPT SERIES NEW CONSTRUCTION FITTING



The Testable Primary Termination New Construction Fitting brings both convenience and innovation for a simple and permanent installation.



PF-TPT-2F-32

### INTEGRATED TEST PORT

The integrated test port eliminates the need for a separate test boot.

### MISALIGNMENT FLEXIBILITY

Works with angled pipe entries up to 10° and allows for ±1" pipe misalignment.

### COST EFFECTIVE

PCI's penetration fittings are the most affordable fiberglass fittings on the market, with a similar cost to rubber or plastic fittings.

### PERMANENT BONDING



EP2A is used to bond fittings to fiberglass and steel. It has great gap filling properties and excellent sag resistance, making it a simple and dependable bonding solution.

### LONG-TERM SOLUTION


100% fiberglass construction provides superior strength and ensures the fitting will withstand long-term exposure to all fuels, including ethanol. These can replace rubber or plastic boots.

Part No.	Install	Pipe	Length	ID	OD
PF-TPT-2F-32	Flat Wall	3" x 2" RTIIA	6"	2.4"	7"
PF-TPT-2F-43	Flat Wall	4" x 3" RTIIA	6"	3.8"	7.8"
PF-TPT-2F-64	Flat Wall	6" x 4" RTIIA	8.5"	4.8"	10"
PF-TPT-2F-L2*	Flat Wall	2" LCX	6"	2.4"	7"
PF-TPT-2F-L3*	Flat Wall	3" LCX	6"	3.8"	7.8"
PF-TPT-2F-L4*	Flat Wall	4" LCX	8.5"	4.8"	10.8"

\*LCX Adapter Included



### PART NUMBER LEGEND

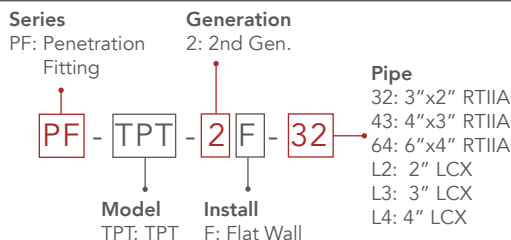

**pci** PETROLEUM CONTAINMENT, INC.