




SRB SERIES - OVERSIZED REPAIR FITTING

The intentional design of the SRB Repair Fittings makes repairs straight forward and allows for field modification. The oversized model is designed to eliminate the need to pair the SRB with our BSO fitting.

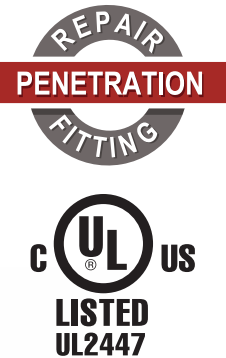

BAND CLAMP W/ RETENTION RIM

The stainless steel band clamp holds the fitting in place and the retention rim prevents the clamp from sliding off the fitting while the epoxy cures.

FIBERGLASS SLEEVE*

A fiberglass sleeve is included with flex pipe models. This is used to bond to polyethylene with our Clear Magic adhesive to create a permanent fiberglass-to-fiberglass installation.

COST EFFECTIVE

PCI's penetration fittings are the most affordable fiberglass fittings on the market, with a similar cost to rubber or plastic fittings.

FIELD MODIFIABLE

The SRB series can be modified in the field to simplify service work.

PERMANENT BONDING

EP2A is used to bond fittings to fiberglass and steel. It has great gap filling properties and excellent sag resistance, making it a simple and dependable bonding solution.

Clear Magic, PCI's proprietary three-part adhesive, can be used with any of our fiberglass fittings to permanently bond fiberglass to polyethylene.

LONG-TERM SOLUTION


100% fiberglass construction provides superior strength and ensures the fitting will withstand long-term exposure to all fuels, including ethanol. These can replace rubber or plastic boots.



PF-SRB-2F-L2

Pipe	Flat Wall	ID	OD
3/4" Galv. Conduit	PF-SRB-2F-C8	1.1"	8"
1" Galv. Conduit	PF-SRB-2F-C1	1.4"	8"
2" RTIIA	PF-SRB-2F-R2	2.4"	8"
3" RTIIA	PF-SRB-2F-R3	3.6"	8"
4" RTIIA	PF-SRB-2F-R4	4.8"	8"
2" LCX	PF-SRB-2F-L2	2.7"	8"
3" LCX	PF-SRB-2F-L3	3.8"	8"
4" LCX	PF-SRB-2F-L4	4.6"	8"
1.5" O.D. Flex Pipe	PF-SRB-2F-P15*	1.7"	8"
2" O.D. Flex Pipe	PF-SRB-2F-P20*	2.2"	8"
2.5" O.D. Flex Pipe	PF-SRB-2F-P25*	2.7"	8"

*Flex Pipe SRB Models include the Fiberglass Sleeve to Bond Fiberglass to Polyethylene



PART NUMBER LEGEND

Series	Install	Pipe
PF: Penetration Fitting	F: Flat Wall R: Round Wall	C8: 3/4" Galv. Conduit C1: 1" Galv. Conduit R2: 2" RTIIA R3: 3" RTIIA R4: 4" RTIIA L2: 2" LCX L3: 3" LCX L4: 4" LCX P15: 1.5" O.D. Flex Pipe P20: 2" O.D. Flex Pipe P25: 2.5" O.D. Flex Pipe
Model SRB: SRB	Generation 2: 2nd Gen.	

