




SRB SERIES REPAIR FITTING

The intentional design of the SRB Repair Fittings makes repairs straight forward and allows for field modification. Comparable repair fittings from other manufacturers are twice the cost and lack the features that make the SRB easy to install.

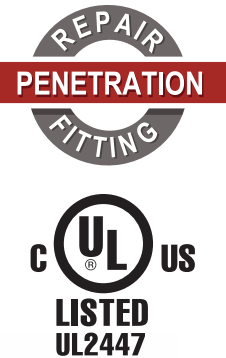

BAND CLAMP W/ RETENTION RIM

The stainless steel band clamp holds the fitting in place and the retention rim prevents the clamp from sliding off the fitting while the epoxy cures.

FIBERGLASS SLEEVE*

A fiberglass sleeve is included with flex pipe models. This is used to bond to polyethylene with our Clear Magic adhesive to create a permanent fiberglass-to-fiberglass installation.

COST EFFECTIVE

PCI's penetration fittings are the most affordable fiberglass fittings on the market, with a similar cost to rubber or plastic fittings.

FIELD MODIFIABLE

The SRB series can be modified in the field to simplify service work.

PERMANENT BONDING

EP2A is used to bond fittings to fiberglass and steel. It has great gap filling properties and excellent sag resistance, making it a simple and dependable bonding solution.

Clear Magic, PCI's proprietary three-part adhesive, can be used with any of our fiberglass fittings to permanently bond fiberglass to polyethylene.

LONG-TERM SOLUTION


100% fiberglass construction provides superior strength and ensures the fitting will withstand long-term exposure to all fuels, including ethanol. These can replace rubber or plastic boots.



PF-SRB-1F-C8

Pipe	Flat Wall	Round Wall	ID	OD
3/4" Galv. Conduit	PF-SRB-1F-C8	PF-SRB-1R-C8	1.1"	6"
1" Galv. Conduit	PF-SRB-1F-C1	PF-SRB-1R-C1	1.4"	6"
2" RTIIA	PF-SRB-1F-R2	PF-SRB-1R-R2	2.4"	6"
3" RTIIA	PF-SRB-1F-R3	PF-SRB-1R-R3	3.6"	6"
4" RTIIA	PF-SRB-1F-R4	PF-SRB-1R-R4	4.8"	7"
2" LCX	PF-SRB-1F-L2	PF-SRB-1R-L2	2.7"	6"
3" LCX	PF-SRB-1F-L3	PF-SRB-1R-L3	3.8"	6"
4" LCX	PF-SRB-1F-L4	PF-SRB-1R-L4	4.6"	7"
1.5" O.D. Flex Pipe	PF-SRB-1F-P15*	PF-SRB-1R-P15*	1.7"	6"
2" O.D. Flex Pipe	PF-SRB-1F-P20*	PF-SRB-1R-P20*	2.2"	6"
2.5" O.D. Flex Pipe	PF-SRB-1F-P25*	PF-SRB-1R-P25*	2.7"	6"

* Flex Pipe SRB Models include the Fiberglass Sleeve to Bond Fiberglass to Polyethylene



PART NUMBER LEGEND

Series	Generation	Pipe
PF: Penetration Fitting	1: 1st Gen.	C8: 3/4" Galv. Conduit
		C1: 1" Galv. Conduit
		R2: 2" RTIIA
		R3: 3" RTIIA
		R4: 4" RTIIA
		L2: 2" LCX
		L3: 3" LCX
		L4: 4" LCX
		P15: 1.5" O.D. Flex Pipe
		P20: 2" O.D. Flex Pipe
		P25: 2.5" O.D. Flex Pipe

