

PCS4200 Series



100% fiberglass.
100% dependable.



ENGINEERED FOR QUALITY

The closed-molded design provides a consistent wall thickness with a smooth finish on the inside and outside, making it easier to prep and providing a better seal for rubber/gasketed entry fittings.

ENGINEERED FOR LOGISTICS

Nestable Space Saver design and integrated features reduce shipping costs and warehouse space. Up to 12 risers, 6 bases, or 3 full sumps per pallet.

ENGINEERED FOR DURABILITY

This 100% fiberglass sump is manufactured with the most corrosion-resistant composites available ensuring secondary containment dependability for the life of the station.

ENGINEERED FOR VERSATILITY

The universal base works for all applications: tank collar, fitting adapter, and manway installations. With 27" of height adjustability and 10% more working space that the competitor's 42" sump, the PCS does it all.

**SPECIAL
INTRODUCTORY
PRICING**

PART NUMBER LEGEND

Series
PCS42: PCS Series

Base
B: Solid Bottom
C: Collar Mount

Bonding Kit
0: No Bonding Kit
1: Epoxy Bonding Kit
2: Two Epoxy Bonding Kits

Sump Height
60 U-3 B 0
Lid
3: Twist-Lok


PRODUCT SIZES & PRICES

Part No.	Adjustability (A)	Overall Height (B)
PCS4260U	2.5" - 29.5"	32" - 59"
Options (Example: PCS4260-XXX)		LIST PRICE
-3B0	Solid Bottom, Twist-Lok Lid, No Bonding Kit	\$1920
-3B1	Solid Bottom, Twist-Lok Lid, (1) Epoxy Bonding Kit	\$2125
-3B2	Solid Bottom, Twist-Lok Lid, (2) Epoxy Bonding Kits	\$2280
-3C0	42" Collar Mount, Twist-Lok Lid, No Bonding Kit	\$1920
-3C2	42" Collar Mount, Twist-Lok Lid, (2) Epoxy Bonding Kits	\$2280


* Dimensions are based on Solid Bottom sumps only
** Subtract 1" if mounting to a 42" tank collar




12 Bases, 6 Risers, or 3 Full Sumps per pallet

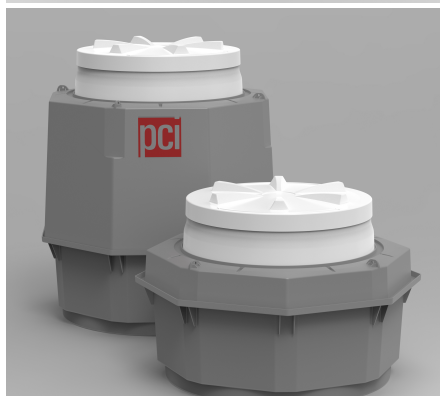

MAX HEIGHT: 59" / MIN HEIGHT: 32"

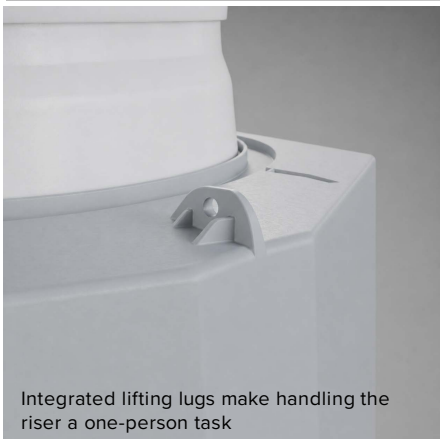

Integrated lifting lugs make handling the riser a one-person task

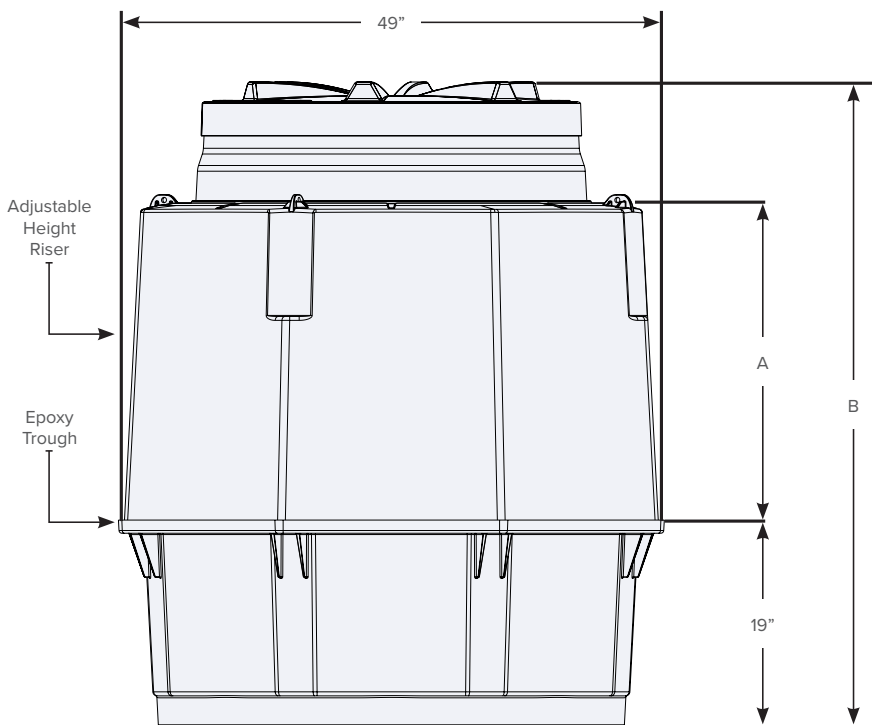

TWISTLOK
access cover

100%
FIBERGLASS

**SPACE
SAVER**

**DRI-SUMP
COMPATIBLE**