

RSS Series Dispenser Sump

100% fiberglass

100% dependable



ENGINEERED FOR QUALITY

The closed-molded design provides a consistent wall thickness with a smooth finish on the inside and outside.

ENGINEERED FOR LOGISTICS

Nestable design and integrated features reduce shipping costs and warehouse space.

ENGINEERED TO LAST

Manufactured with the most corrosion resistant composites available ensuring secondary containment dependability for the life of the station.

100% FIBERGLASS

High quality, non-corrosive fiberglass provides long-term reliable containment from fuel exposure without warping, cracking or becoming brittle.

DUAL CONDUITLESS ENTRY

Designed to seamlessly accommodate either conduitless entry configuration without additional adapters.

HEIGHT-ADJUSTABLE RISER

Trim on-site for a perfect fit to any dispenser height, ensuring a clean, precise installation.

PRODUCT SIZES & PRICES

Part No.	Height	Length	List Price
RSS146371	28.5" - 32"	37.2"	973.00
RSS174371	28.5" - 32"	37.2"	973.00

DISPENSER MODEL	SINGLE WALL	WIDTH	LENGTH	STABILIZER KIT
Wayne Helix	RSS174371	17"	372"	SVU-L
Wayne Ovation 3+1+1	RSS146371	14.75"	37.2"	SVU-L
Wayne Ovation	RSS146371	14.75"	37.2"	SVU-L
Wayne Ovation HS	RSS146371	14.75"	37.2"	SVU-L
Gilbarco Encore	RSS174371	17"	37.2"	SVU-L

PART NUMBER LEGEND

Series

RSS: Standard

Length

371: 37.2"

RSS

146

371

A

Width



146: 14.75"

174: 17"

Suffix (PCI Internal Identifier)

A: Angle

S: Unistrut

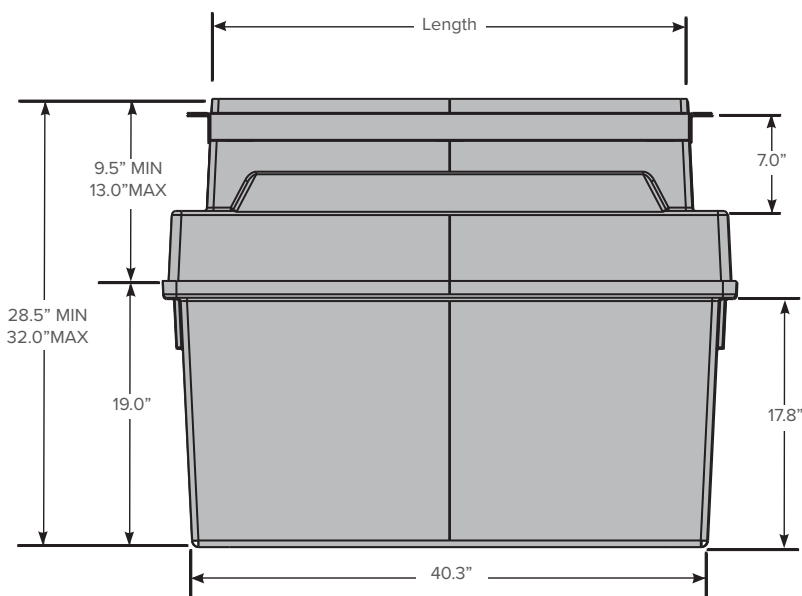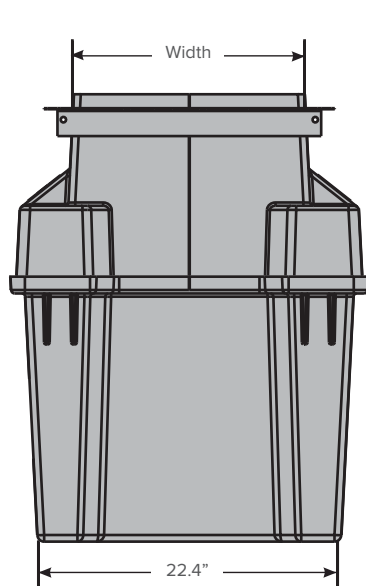


Nestable: Up to 12 sumps can ship on a single pallet.



Height-adjustable riser.

Pre-plumbed options available.

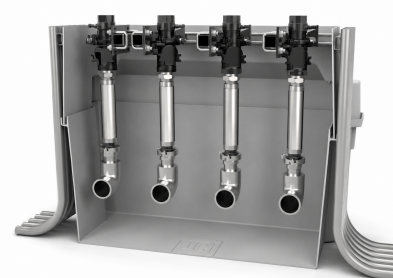

Pre
Plumbed
Service

SPACE
SAVER

DRI-SUMP
COMPATIBLE

100%
FIBERGLASS